

Notes:

- Neutral (must be insulated) may be reduced no more than two sizes on residential application. No reduction of the neutral is allowed on commercial applications.
- Weatherproof fittings required.
- This meter loop specification is good for the following voltages: 120/240, 120/208, 240/480 & 277/480. Please use MS-301 for straight 480 Delta applications only.
- Meter pole must remain free of structures and private attachments other than meter loop.
- Bluebonnet Electric will supply ground rod.
- On steel poles use a 3/8" X 1 1/2" self tapping screw.
- For your safety, only Bluebonnet personnel are authorized to install meter loops or other BEC equipment on a Bluebonnet pole. Members shall have loop assembled and available for installation by Bluebonnet.

Latest update can be found at <http://www.bluebonnetelectric.coop>

FOR SINGLE PHASE TRAFFIC CONTROL DEVICES:

200amp, 4 terminal, 1-phase, will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R rating. Lever by-pass is only required for meter installations serving traffic control devices, including railroad, that need to remain functional at all times.

FOR THREE PHASE APPLICATIONS DESCRIPTION:


200amp, 7 terminal, 3-phase, 4-wire will require a lever by-pass meeting ANSI C12.7, UL 414, and NEMA 3R. Meter cans are available for purchase through Techline or any other electrical supplier provided it meets all Bluebonnet Electric Cooperative specifications. Techline (512-332-2978)

Galvanized metal conduit with (1) locknut and fiber bushing inside meter can on nipple and (1) locknut under meter can. Maintain 3-6" distance between the meter can and the disconnect. Member shall use a metal nipple. A Straight or offset nipple is acceptable.

#6 solid, bare ground wire and clamp attached to Bluebonnet's pole ground. Ground rod provided by Bluebonnet.

*** WIRING INSTALLATIONS MUST MEET LOCAL GUIDELINES, IF APPLICABLE, SET FORTH BY CITY, COUNTY, OR OTHER GOVERNING ENTITY IN THE EVENT THESE REQUIREMENTS ARE MORE STRINGENT THAN BLUEBONNET SPECIFICATIONS. ***

FOR THE MEMBER'S SAFETY, WIRING INSTALLATIONS SHALL CONFORM TO THE REQUIREMENTS OF THE NEC, TDLR AND NESC.

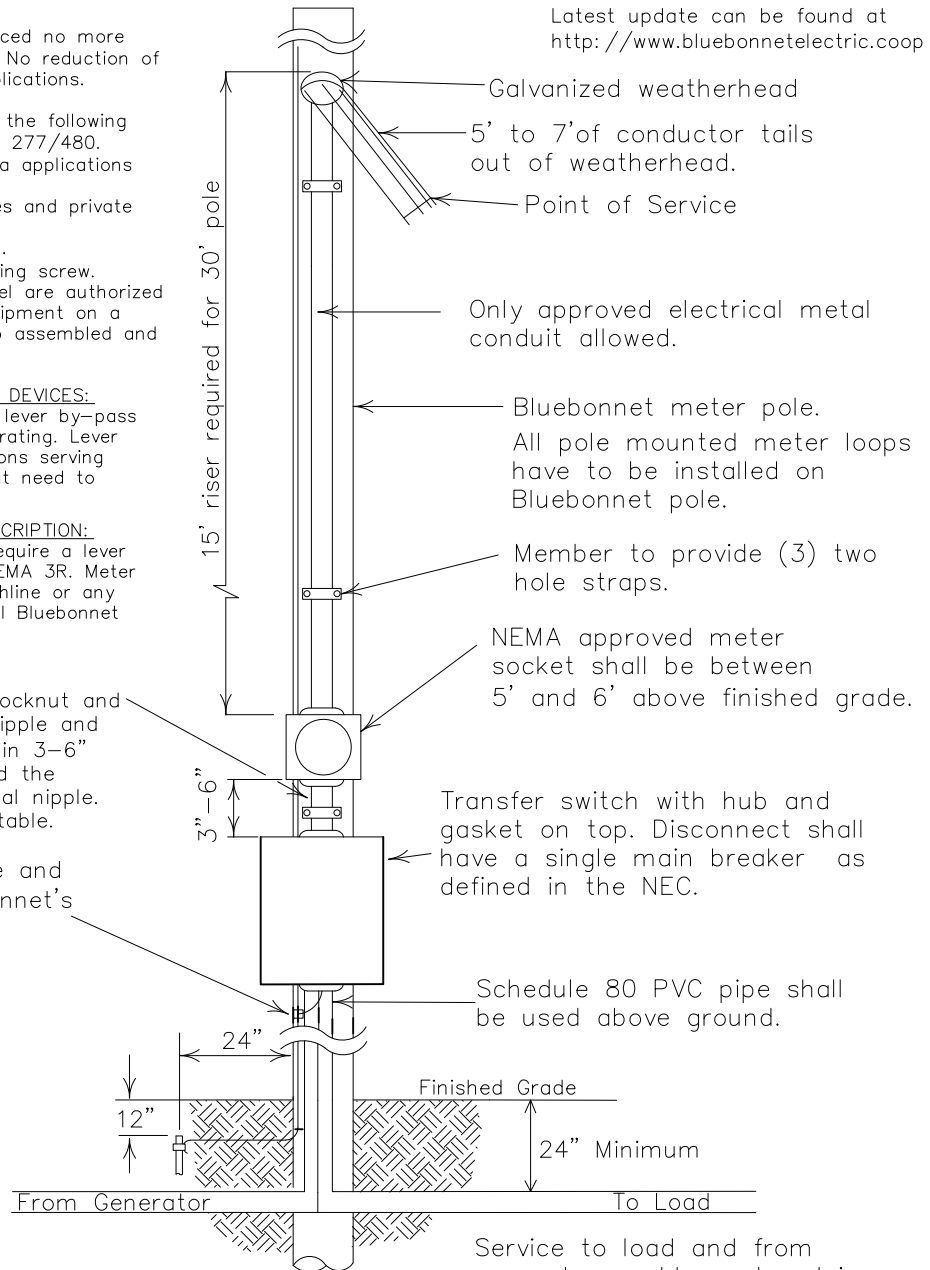

GENERATOR SHALL BE A MINIMUM OF 15' AWAY FROM BLUEBONNET'S POLE AND/OR EQUIPMENT AND OUTSIDE OF BEC EASMENT.

Service to load and from generator cable enclosed in minimum schedule 40 Gray PVC nonmetallic conduit.

CURRENT CARRYING CAPACITIES AND CONDUIT/NIPPLE SIZE REQUIREMENTS OF STANDARD WIRE SIZES (RHH, RHW, THW, THWN, THHN, AND XHHW) REFER TO NEC FOR OTHER CALCULATIONS.

| COPPER CONDUCTOR | | | ALUMINUM CONDUCTOR | | |
|------------------|--------------|---------------------|--------------------|--------------|---------------------|
| Wire Size | Breaker Size | Conduit/Nipple Size | Wire Size | Breaker Size | Conduit/Nipple Size |
| #6 | 60 Amp | 1 1/4" Conduit | #4 | 60 Amp | 1 1/4" Conduit |
| #4 | 100 Amp | 1 1/4" Conduit | #2 | 100 Amp | 1 1/4" Conduit |
| #2 | 125 Amp | 1 1/2" Conduit | #1/0 | 125 Amp | 1 1/2" Conduit |
| #1 | 150 Amp | 2" Conduit | #2/0 | 150 Amp | 2" Conduit |
| #2/0 | 200 Amp | 2" Conduit | #4/0 | 200 Amp | 2" Conduit |

15' METER LOOP

1Ø OR 3Ø 60-200 AMP

METER LOOP WITH TRANSFER SWITCH ON METER POLE

(GOOD FOR VOLTAGES: 120/240, 120/208, 240/480, 277/480)



| | | | | |
|------|-----------|------------------|---------------------------|----------------------------|
| DATE | REVISIONS | Drawn By : JB | Checked By : STANDARDS | Approved By : STANDARDS |
| | | Scale : NONE | Date: 03-29-2022 | MS-4115 |